Weighing indicator - Table mounting

IPE100

10 000 d / 3 x 3 000 d

- Red led display with 6 digits 15 mm height
- IP54 ABS housing version, waterproof 25-keys functional keyboard
- Up to 16 analog load cells 350 Ω or 16 digital load cells (CB50X-DL or others)
- LCD graphical 25 x 100 mm display
- 2 RS232 outputs and 1 RS485/RS232 output
- Software for weighbridge monitoring, built-in alibi memory

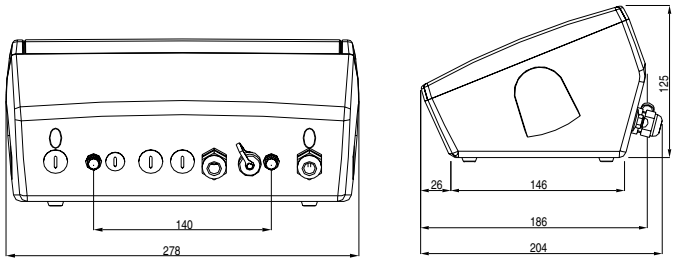

Dimensions in mm

Approved up to 10 000 d according to EN 45501
Power supply: 110-240 VAC
Analog load cell input voltage: 5 VDC
Digital load cell input voltage: integrated 12 VDC
Min. voltage per division: 0.3 µV
Internal resolution: 24 bits
Display: 6 digit LED, 15 mm height + LCD graphic 25 x 100 mm
Warranty: 1 year

P/N	Designation	Cn	$v_{min.}$	DC
632065	DIGITAL & ANALOG INDICATOR IPE100 FOR WEIGHBRIDGES			R4
	Related products:			
	PRINTER TP200			
	INDICATOR/REPEATER IPE50 XLR			

FS: rated capacity / v min = minimal interval (according to cert. OIML R60) / C.E. = Combined error in % of Cn / DC = Code put back